



**ROCKFON® Pacific™**





# ROCKFON® Pacific™

- Economical tile with standard surface
- Class B sound absorption with lightweight 12mm thickness
- Basic range of tile dimensions in semi-concealed and visible grid options
- Easy to clean with a vacuum

## PRODUCT DESCRIPTION

- Stone wool tile
- Visible side: Nuanced white painted fleece
- Rear Side: back fleece
- Painted edges

## ASSORTMENT

Edge detail	Module size (mm)	Weight (kg/m <sup>2</sup> )	Recommended installation System
 A15	600 x 600 x 12	1.6	T15
	1200 x 600 x 12	1.6	
 A24	600 x 600 x 12	1.6	T24
	1200 x 600 x 12	1.6	
 E15	600 x 600 x 12	1.9	T15
 E24	600 x 600 x 12	1.9	T24




## PERFORMANCES



### Sound absorption

$\alpha_w$ : 0.80 (Class B)

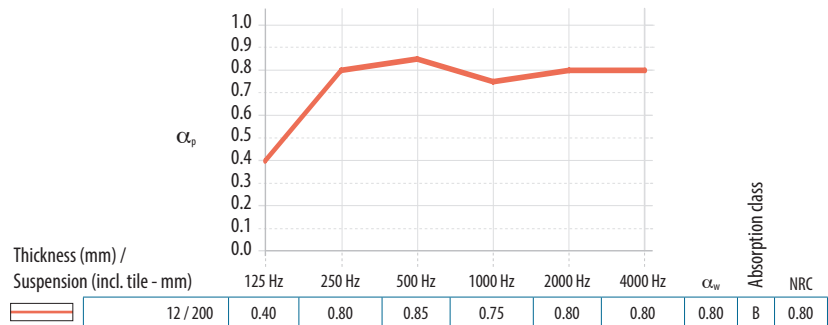

### Reaction to fire

A1



### Light reflection

82%



### Humidity and sag resistance

Up to 100% RH



### Cleaning

Vacuum



### Hygiene

Stone wool provides no sustenance to microorganisms



### Environment

Fully recyclable



### Indoor environment

A selection of ROCKFON products have been awarded



# Understanding the unique performance of ROCKFON stone wool products

Below is an explanation of ALL the performance icons and certification for our complete range of ROCKFON stone wool products. For product specific performance, please refer to the information on the individual product datasheet.



## Sound absorption

Sound absorption is measured in accordance with ISO 354. Sound absorption data  $\alpha_p$ ,  $\alpha_w$  and absorption class are calculated in accordance with ISO 11654. Sound absorption properties of islands and baffles are quantified by the equivalent sound absorption area  $A_{eq}$  expressed as  $m^2$  per item.



## Room-to-room sound insulation

Room-to-room sound insulation  $D_{n,f,w}$  ( $C;C_{tr}$ ) is measured in accordance with ISO 10848-2.



## Direct sound insulation

Sound reduction index  $R_w$  ( $C;C_{tr}$ ) is measured in accordance with ISO 140-3.



## Reaction to fire

Reaction to fire is classified in accordance with EN 13501-1.



## Fire protection

The stone wool core of ROCKFON products is non-combustible with a melting point of more than 1000°C and provides fire protection. Some ROCKFON ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms.



## Light reflection

Light reflection expressed in % is measured in accordance with ISO 7724-2.



## Humidity & sag resistance

ROCKFON ceiling tiles are dimensionally stable even at humidity levels of up to 100% relative humidity and can be installed at all temperatures ranging from 0°C to 40°C. They can be installed during the very early stage of the build (when windows are not fully sealed). Their lightweight yet stable non-hygroscopic character minimises the final weight of the fully-installed ceiling. ROCKFON ceiling tiles are predominantly classified as Class 1/C/0N in accordance with EN 13964. Certain module sizes (width above 700mm) are Class 2/C/0N.



## Surface durability

The surface of some ROCKFON products is specially treated to provide enhanced durability and dirt resistance.



## Cleaning

### Vacuum:

The surface can be vacuum cleaned with a soft brush attachment.

### Damp cloth:

The surface can be cleaned using a damp cloth or sponge with a slightly alkaline detergent (pH between 7 and 9) without alcohol, ammonia or chlorine. This may render the surface slightly shinier, so we recommend cleaning the entire surface evenly.



## Hygiene

Stone wool provides no sustenance to the following microorganisms tested in accordance with JIS Z 2801:2000 and ASTM C 1338-96:

- Escherichia coli
- Staphylococcus aureus
- Methicillin-resistant staphylococcus aureus (MRSA)
- Stachybotrys chartarum
- Penicillium brevicompactum
- Alternaria tenuissima
- Aspergillus niger
- Sporobolomyces roseum
- Rhodotorula rubra



## Clean room

Clean room classification is measured in accordance with ISO 14644-1.



## Thermal insulation

The thermal conductivity of products with a thickness  $\geq 30$ mm is measured in accordance with EN 12667 and expressed in  $mW/mK$ . Thermal resistance is expressed in  $m^2K/W$ .

03.2017 | Subject to alterations in range and product technology without prior notice. ROCKFON accepts no responsibility for printing errors.

**ROCKFON Shanghai**  
Room 1401, Summit Centre  
1088, Yan'an West Rd,  
Changning District  
Shanghai, P.R.China (200052)  
Tel. (+86) 21 6211 6725  
Fax. (+86) 21 6211 3479  
info@rockfon.cn  
www.cn.rockfon.asia

**ROCKFON Shenzhen**  
No. 6 Industrial District  
Tianliao Community  
Guangming New Area  
Shenzhen 518106 P.R.China  
Tel. (+86) 755 2812 9517/  
(+86) 755 2812 9518  
Fax. (+86) 755 2812 9772  
info@rockfon.cn  
www.cn.rockfon.asia

**ROCKFON Hong Kong**  
Unit 2002-3, 20/F, Empress Plaza  
17-19 Chatham Road South  
Tsimshatsui, Kowloon,  
Hong Kong  
Tel. (+852) 2576 6117  
Fax. (+852) 2576 6326  
www.rockfon.asia

**ROCKFON Malaysia**  
15, Jalan Gemilang 1  
Taman Perindustrian  
Cemerlang  
81800 Ulu Tiram, Johor,  
Malaysia  
Tel. (+607) 8673 539  
Fax. (+607) 8673 525  
www.rockfon.asia

**ROCKFON Singapore**  
No. 8, Tuas Avenue 2  
Jurong Town  
Singapore 639448  
Tel. (+65) 6861 4722  
www.rockfon.asia